

Seven Year Maintenance

The following maintenance should be done every 7 years.

1) Replace the Wire Rope

Mandatory wire ropes and sheaves replacement intervals are 7 years.

- Sheaves and wire rope must be replaced as sets.
- Mandatory wire rope and sheaves replacement must be carried out if anyone of the followed conditions exists, even if the interval between the replacements does not exceeds 7 years.
 - Rusted or corroded wire ropes.
 - Kinked, "bird caged", or crushed ropes.
 - Ropes at end of adjustment range.
 - Sheaves failing wear out gage inspection.
 - Ropes with 6 total broken wires in one rope lay, 3 in one strand in one rope lay, 1 valley break, or 1 break at any end termination.

Hydraulic Schematic

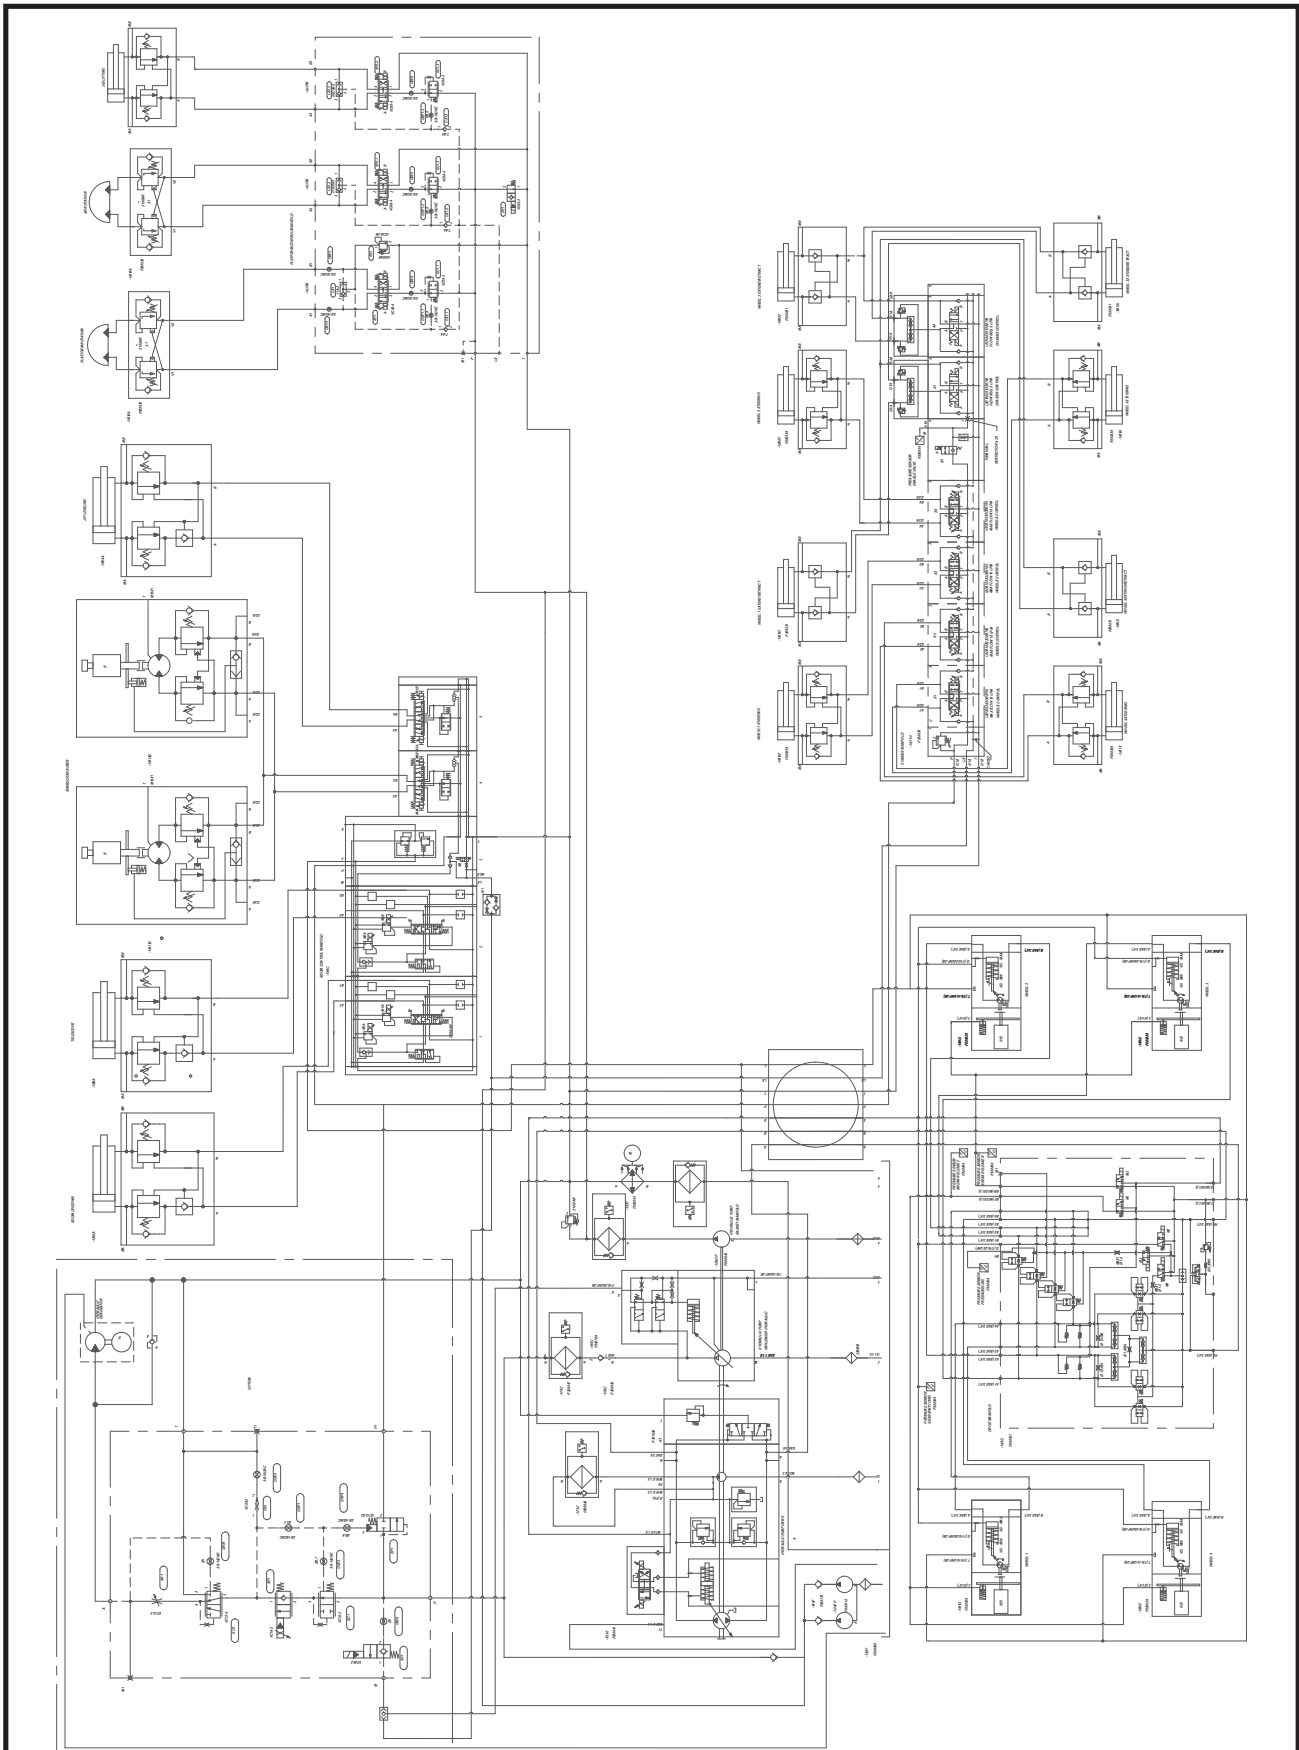



ILLUSTRATION No. 135-RJ
Art 6498

Hydraulic Schematic

Electrical Schematic, Part 1

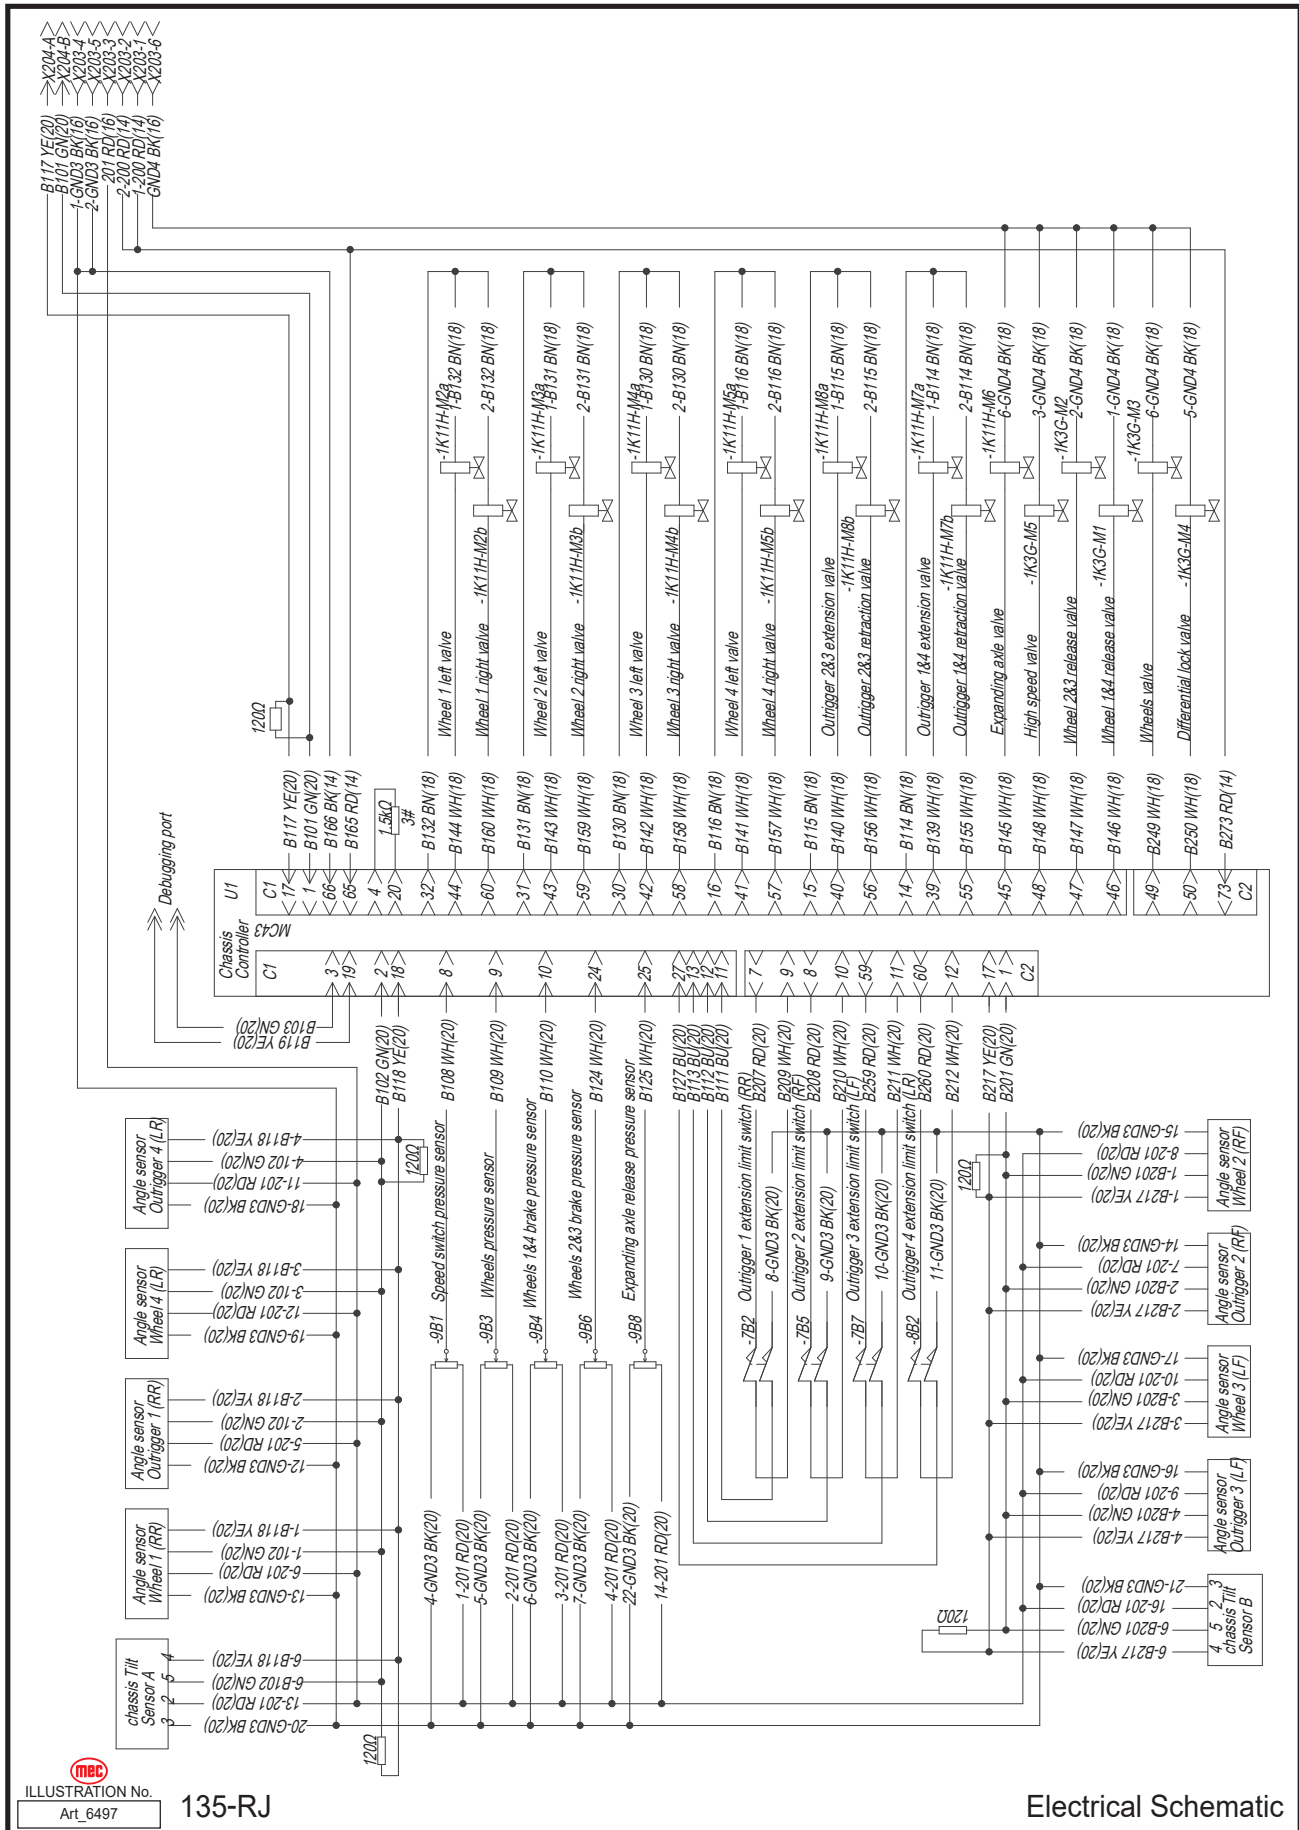


ILLUSTRATION No. Art 6497

135-RJ

Electrical Schematic



Electrical Schematic, Part 2

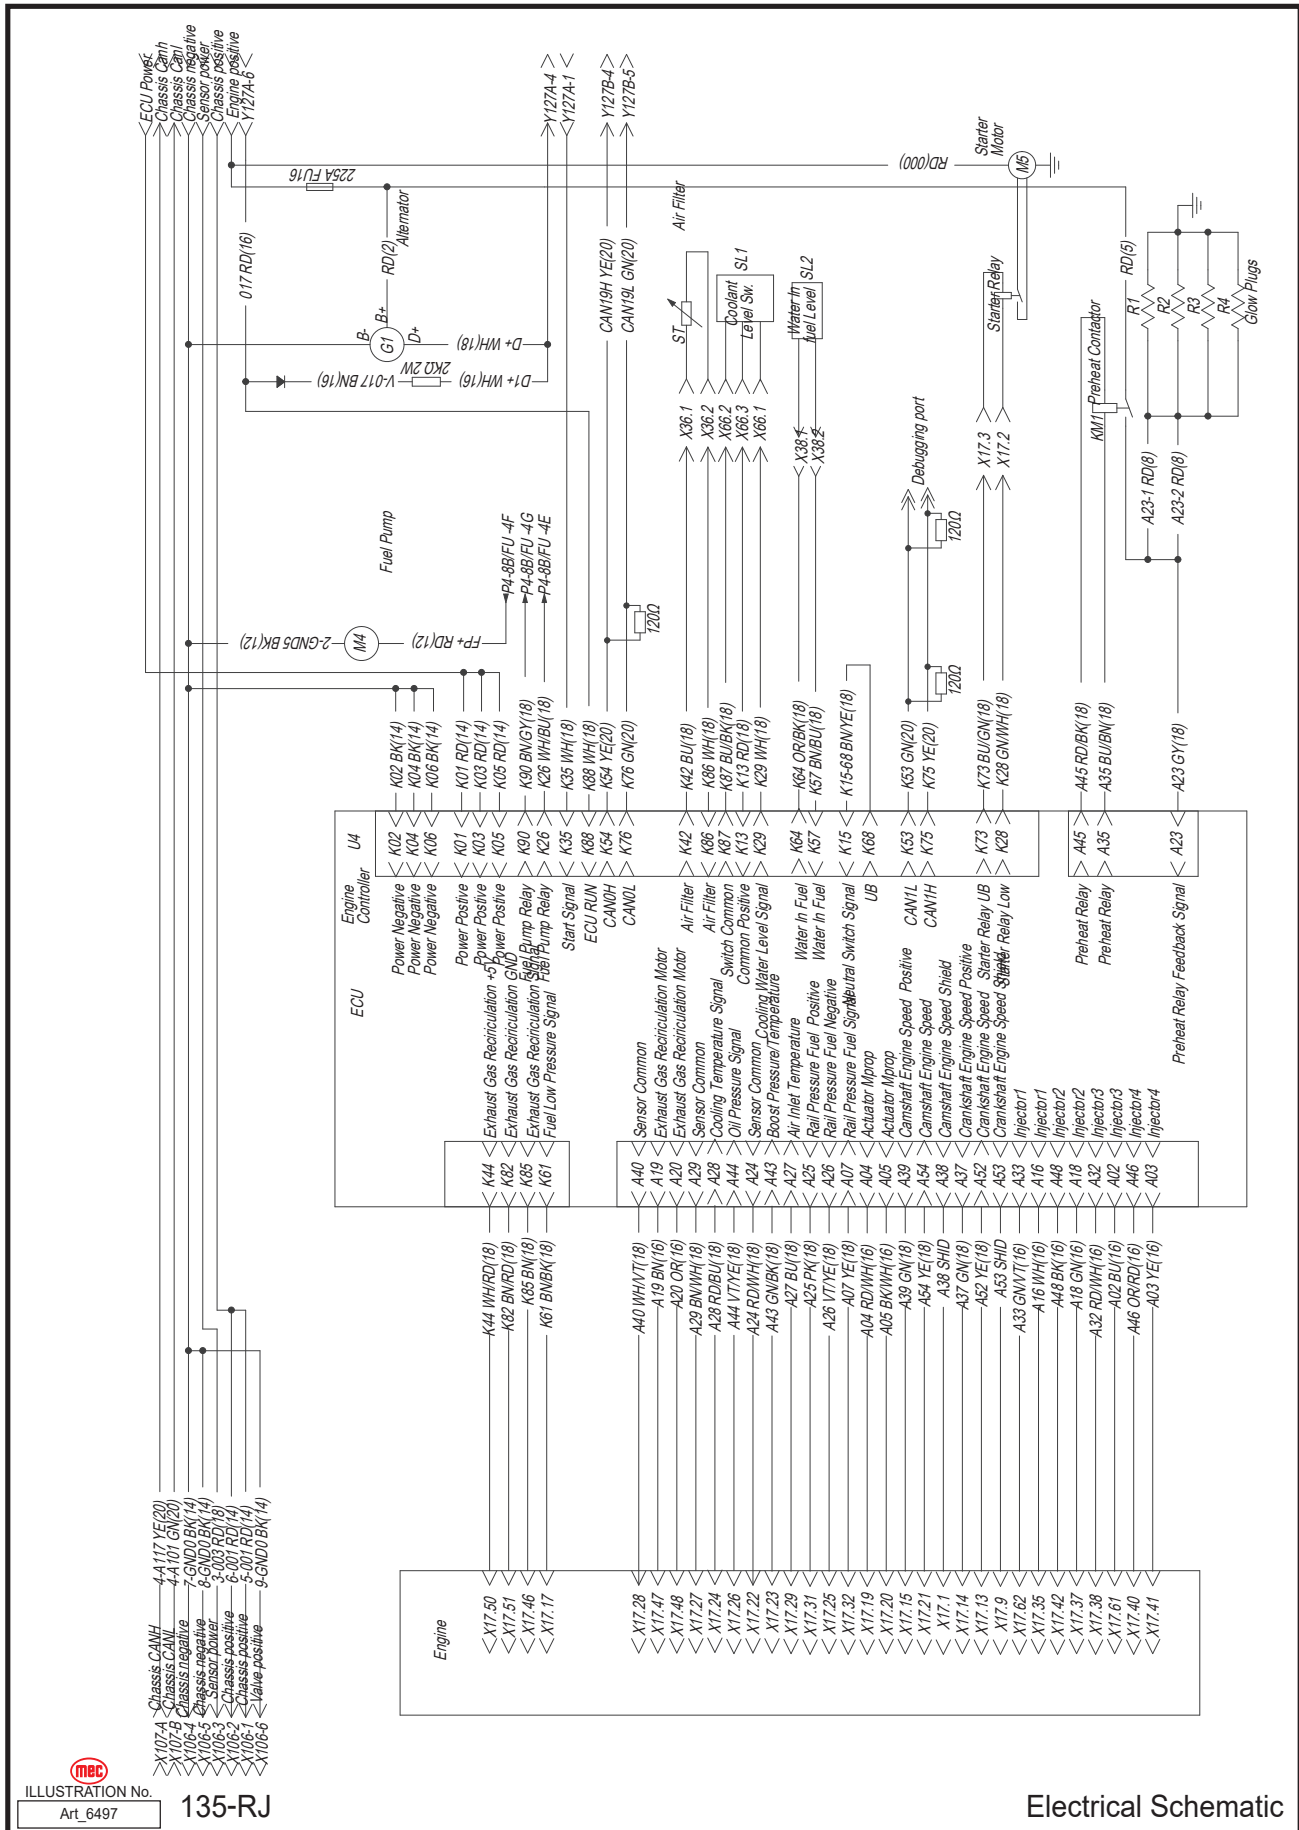


ILLUSTRATION No. Art_6497

135-RJ

Electrical Schematic



Electrical Schematic, Part 3

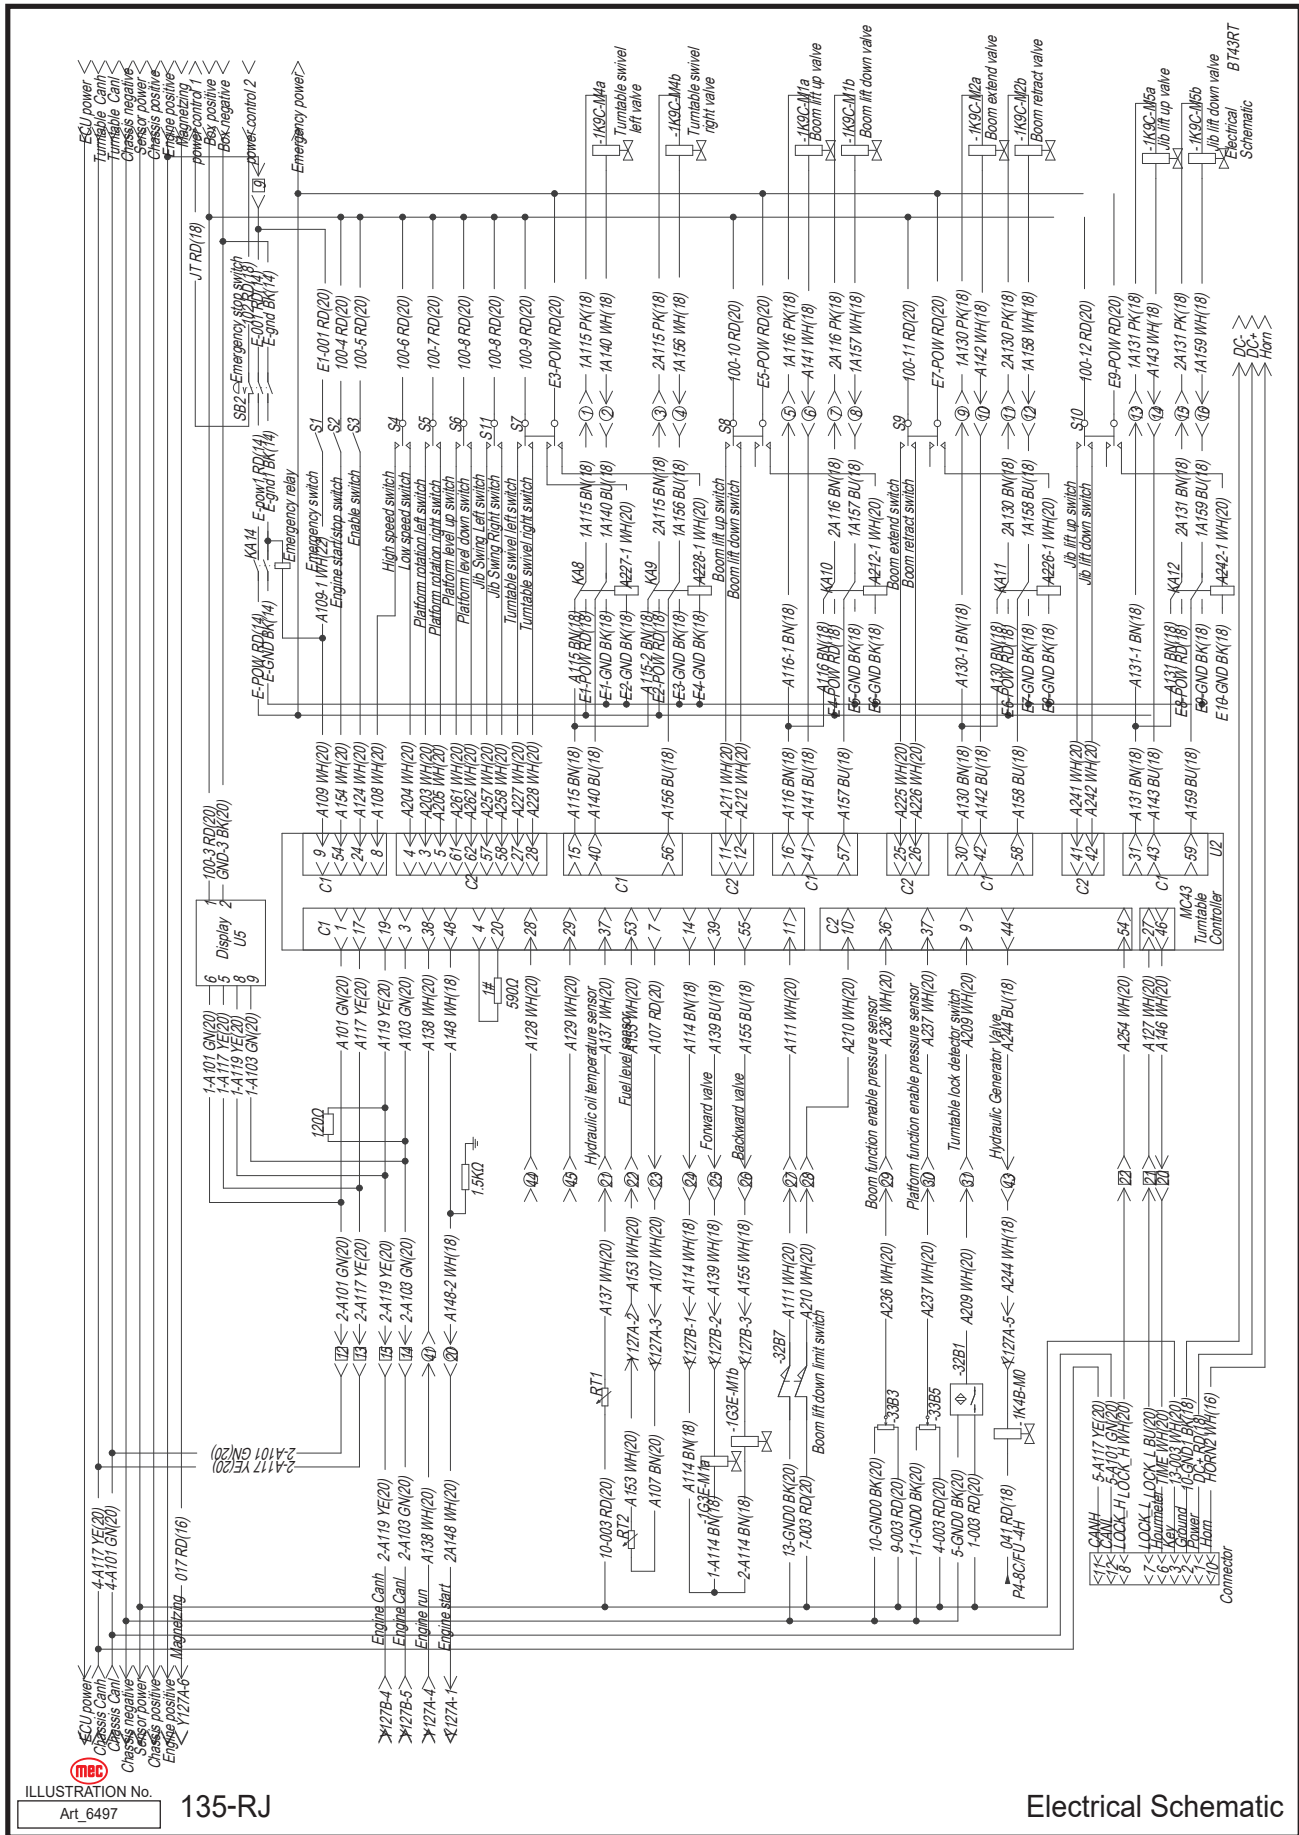



ILLUSTRATION No. Art 6497

135-RJ

Electrical Schematic



Electrical Schematic, Part 4

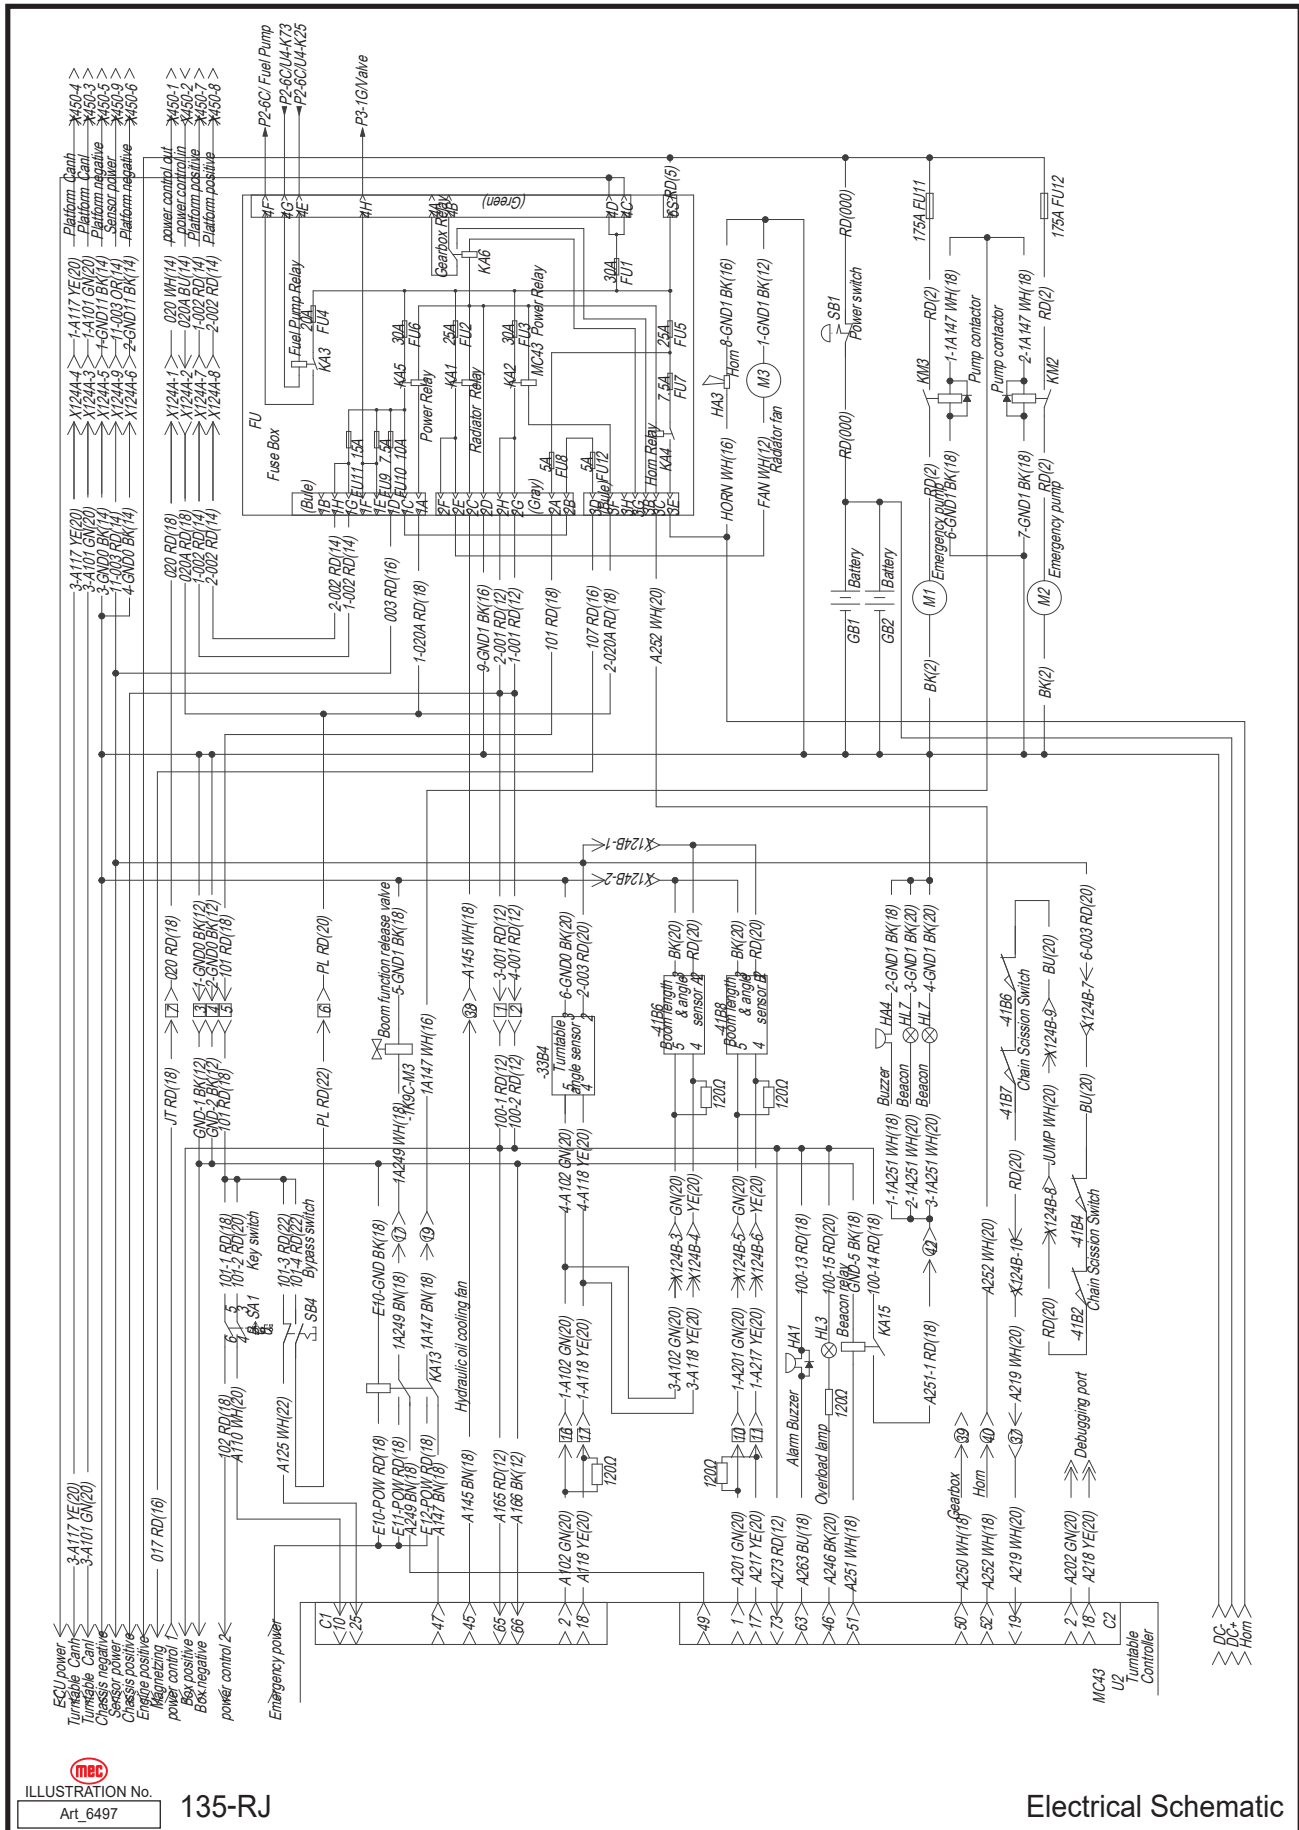

Electrical Schematic, Part 5

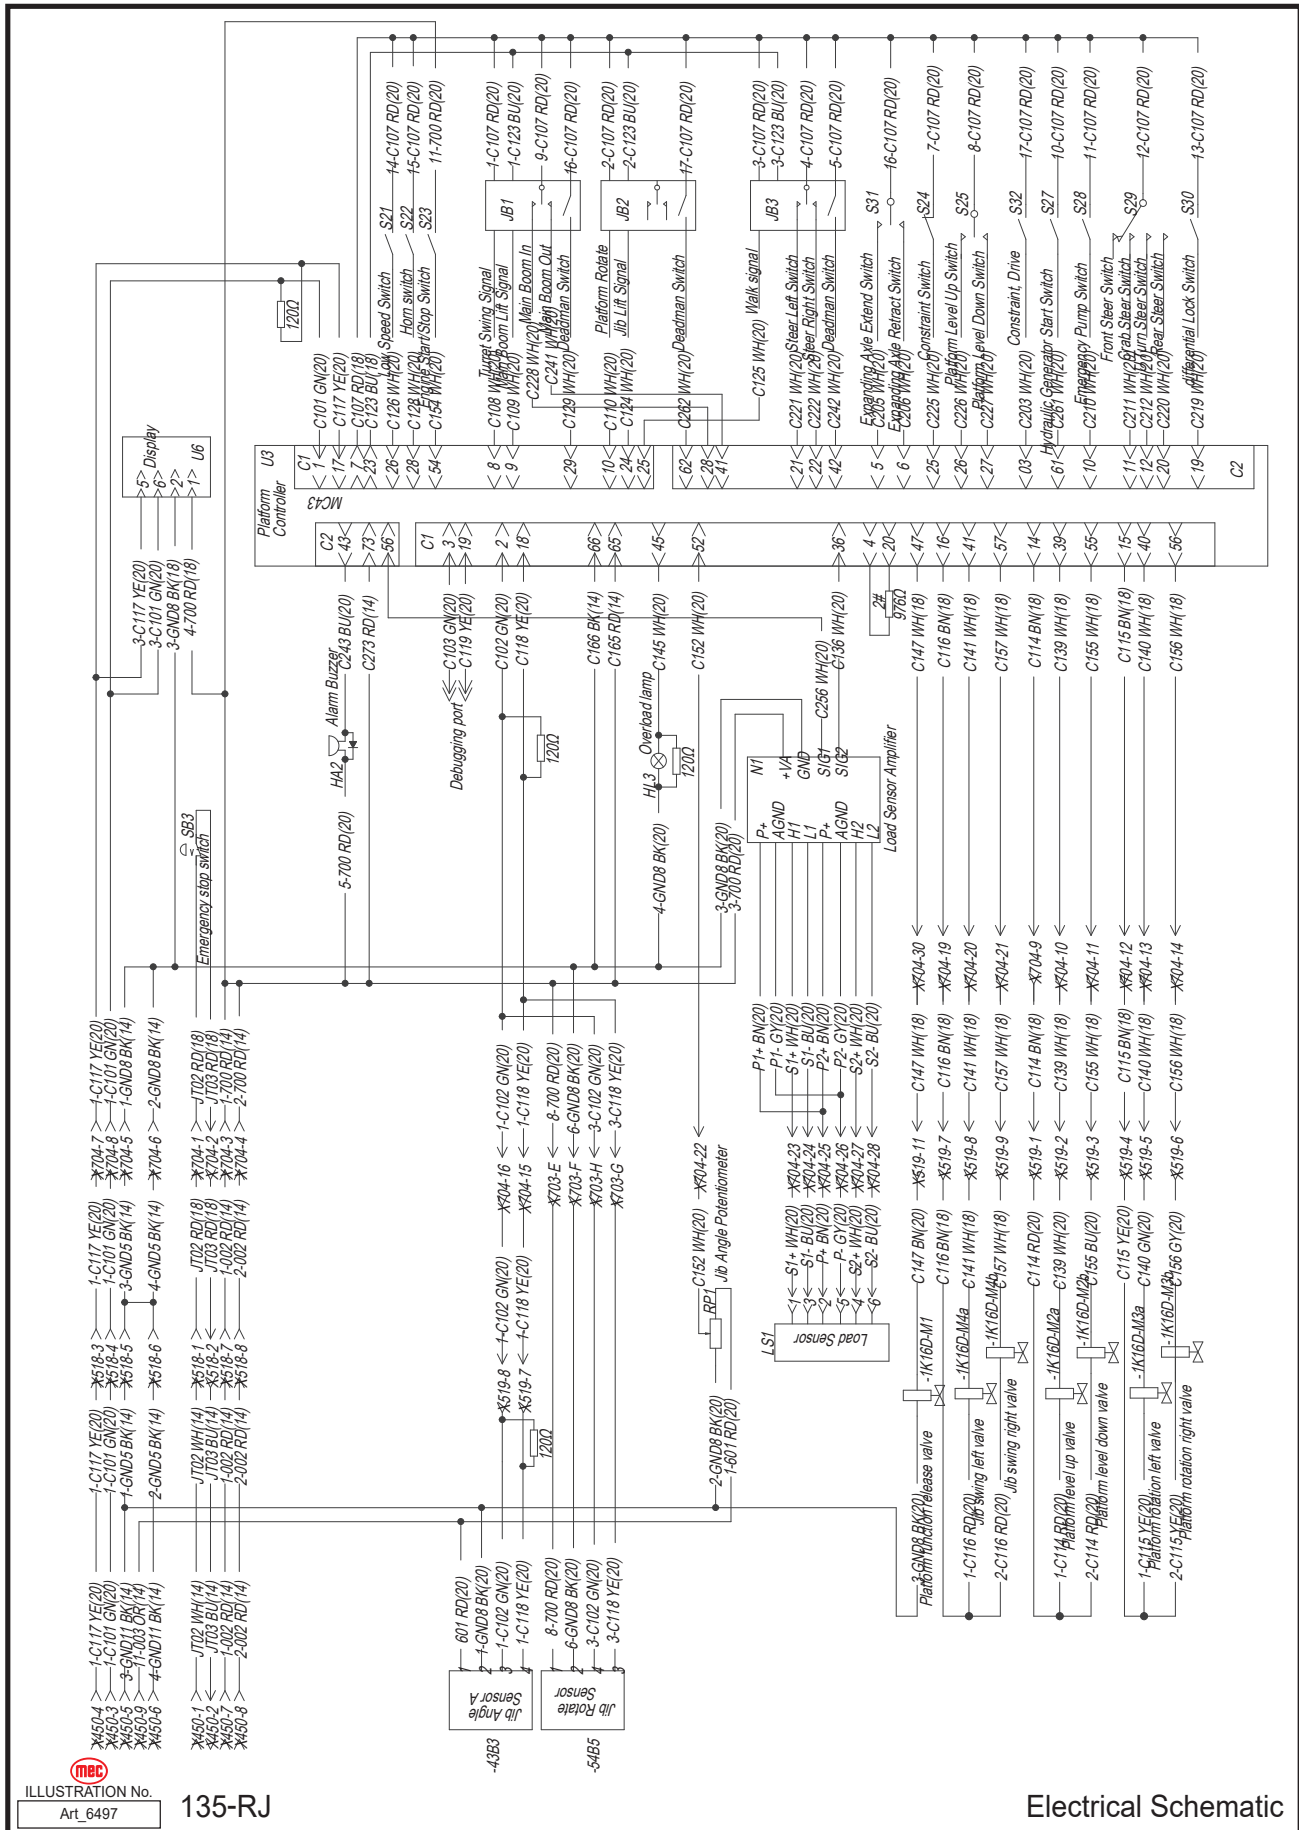


ILLUSTRATION No. Art 6497

135-RJ

Electrical Schematic

